

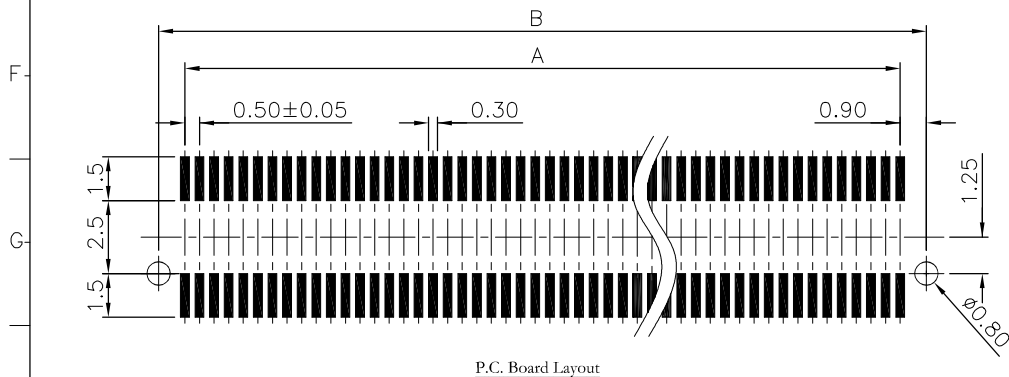
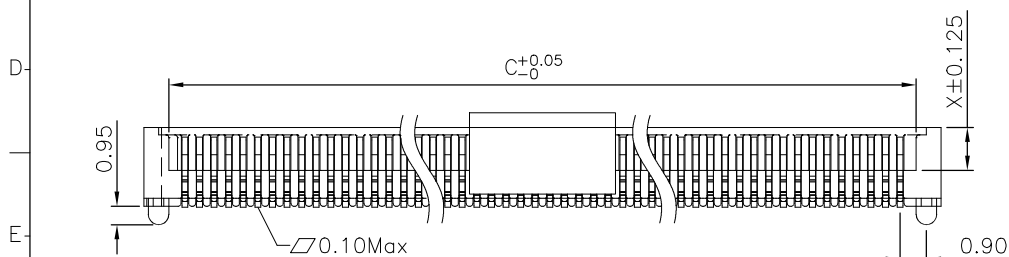
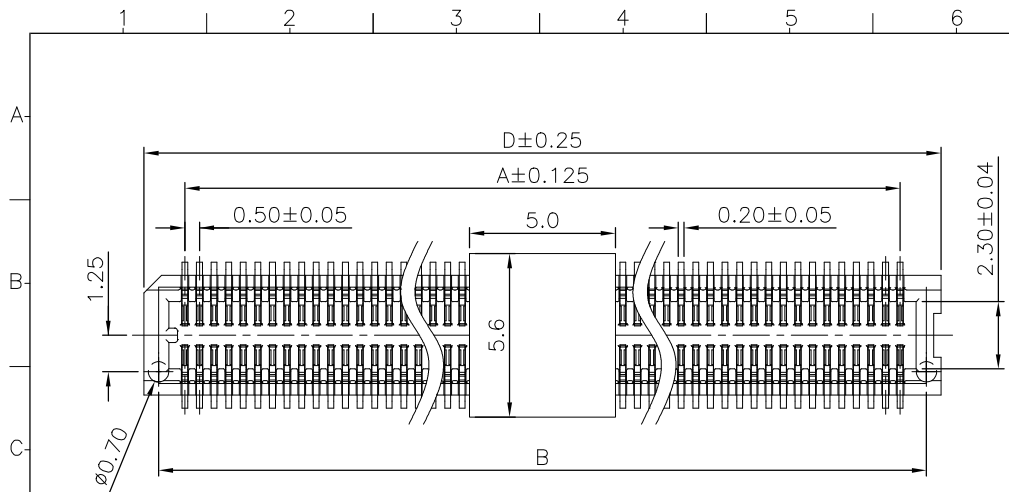


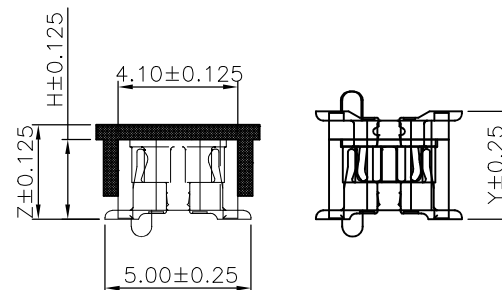

P.C. Board Layout



2332- xx F G 00 D P T x -P
 Series
 Position
 F:Female
 G: Gold Plated
 00:Gold Flash
 D:SMD Type
 Code
 1: 2.74mm
 2: 3.70mm
 T: Tape & Reel
 Package
 P: With Post
 N: Without Post

Tolerances	Dwg. No.	2332D02001	
.x = ±0.30	Projection		
.xx = ±0.20	Unit	mm	Scale 1:N
.xxx = ±0.10	Drawn By	Martin 12/27'23	

Title:
 2332 Series
 Board to Board 0.5mm

① 662

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: PA9T, UL94V-0, Black.

Contacts: Brass.Gold Plated on Contact Area and Gold Flash on solder tail over Nickel 50u" Min..

Electrical Characteristics:

Voltage Rating: 50V.

Current Rating: 0.5 AMP.

Dielectric Withstanding Voltage: AC 500V for 1 minute.

Insulator Resistance: 100MΩ min.

Contact Resistance: 40mΩ max.

Operating Temperature: -20°C~+105°C .

***RoHS Compliant**

Code:1~2 X 2332-xxF	1		2	
	1.47		2.23	
Code:1~2 Z 2332-xxF	1		2	
	3.24		4.2	
Code:1~2 H 2332-xxF	1	1	2	2
	2.74	2.74	3.70	3.70
Code:1~2 H 2332-xxM	1	2	1	2
	2.40	2.74	2.40	2.74
Stacked Height Y	3.70	4.05	4.65	5.00

Dimension											
Positions	A	B	C	D	Positions	A	B	C	D	Positions	A
2X10	4.50	6.30	5.50	7.30	2X31	15.00	16.80	16.00	17.80		
2X11	5.00	6.80	6.00	7.80	2X32	15.50	17.30	16.50	18.30		
2X12	5.50	7.30	6.50	8.30	2X33	16.00	17.80	17.00	18.80		
2X13	6.00	7.80	7.00	8.80	2X34	16.50	18.30	17.50	19.30		
2X14	6.50	8.30	7.50	9.30	2X35	17.00	18.80	18.00	19.80		
2X15	7.00	8.80	8.00	9.80	2X36	17.50	19.30	18.50	20.30		
2X16	7.50	9.30	8.50	10.30	2X37	18.00	19.80	19.00	20.80		
2X17	8.00	9.80	9.00	10.80	2X38	18.50	20.30	19.50	21.30		
2X18	8.50	10.30	9.50	11.30	2X39	19.00	20.80	20.00	21.80		
2X19	9.00	10.80	10.00	11.80	2X40	19.50	21.30	20.50	22.30		
2X20	9.50	11.30	10.50	12.30	2X41	20.00	21.80	21.00	22.80		
2X21	10.00	11.80	11.00	12.80	2X42	20.50	22.30	21.50	23.30		
2X22	10.50	12.30	11.50	13.30	2X43	21.00	22.80	22.00	23.80		
2X23	11.00	12.80	12.00	13.80	2X44	21.50	23.30	22.50	24.30		
2X24	11.50	13.30	12.50	14.30	2X45	22.00	23.80	23.00	24.80		
2X25	12.00	13.80	13.00	14.80	2X46	22.50	24.30	23.50	25.30		
2X26	12.50	14.30	13.50	15.30	2X47	23.00	24.80	24.00	25.80		
2X27	13.00	14.80	14.00	15.80	2X48	23.50	25.30	24.50	26.30		
2X28	13.50	15.30	14.50	16.30	2X49	24.00	25.80	25.00	26.80		
2X29	14.00	15.80	15.00	16.80	2X50	24.50	26.30	25.50	27.30		
2X30	14.50	16.30	15.50	17.30							

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2332-xxFG00DPTx-P			
SHEET	1/1	Ver.No.	A8