

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: PA66, UL94V-0.

Contacts: Brass, Tin Plated.

Screw: Steel, M3.5.

Electrical Characteristics:

Voltage Rating: 300V.

Current Rating: 30A.





Insulation Resistance: 1000M Ω min.at DC 500V.

Withstand Voltage: AC 2500V min.

Wire Range: 10-22 AWG.

Operating Temperature: -40°C~115°C

***RoHS Compliant**

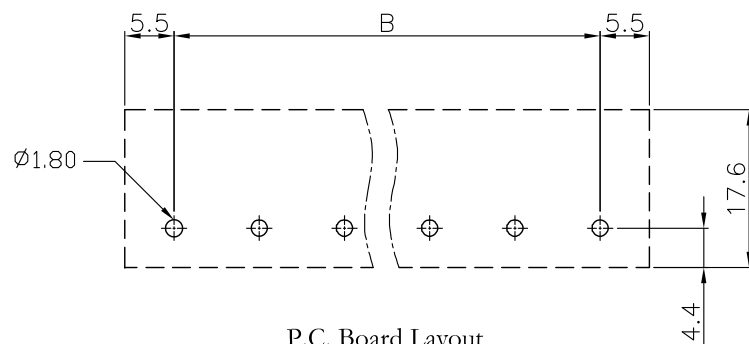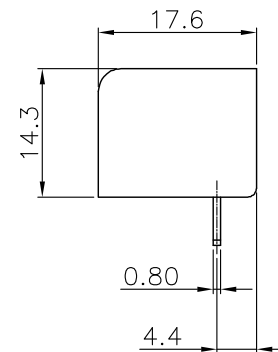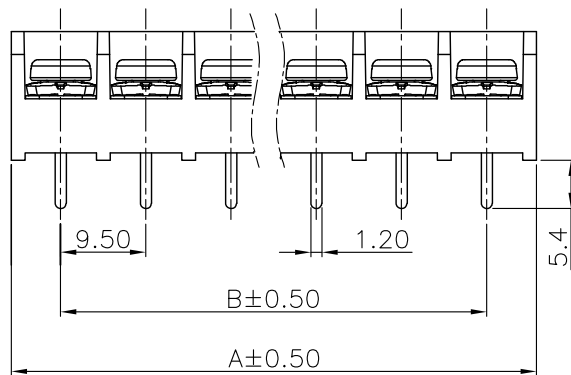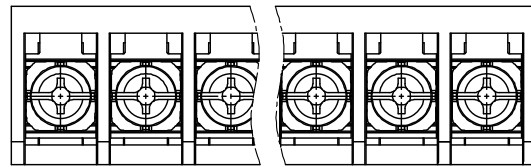

P.C. Board Layout

8936 L 143176 N 2 1 CD xx S B
 Series L:Pitch 9.5mm Manufacturing Code N:W/O Cover 2:Footprint 2
 B: Box Package S: Straight No.of Positions CD:With Flange Dip 5.4 mm

Position	2 Thru 30
Dimension	
A	No.of PositionX9.5+1.5
B	(No.of Position-1)X9.5

Tolerances	Dwg. No.	8936D02003
x = ± 0.50	Projection	
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	Polly 02/06'18

Title:

8936 Series
9.5mm Terminal Block

① 780

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 8936-L143176N21CDxxSB

SHEET	1/1	Ver.No.	A2
-------	-----	---------	----