



REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN200847	

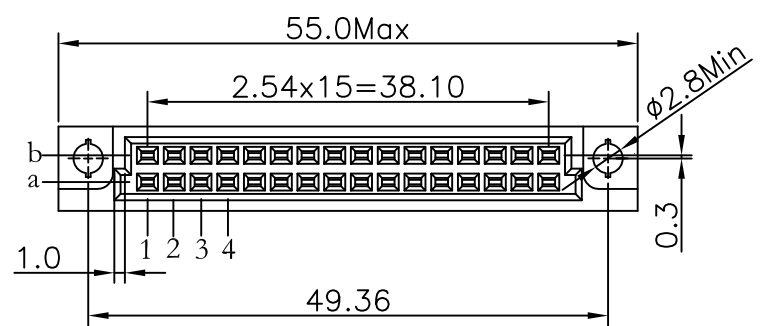




Material and Plating:

Housing:PBT,UL94V-0,Beige.
 Contacts:Copper Alloy.
 Gold Plated on contact Area and 80u"Min Tin or Gold
 Flash plated on Press Fit over 50u"Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

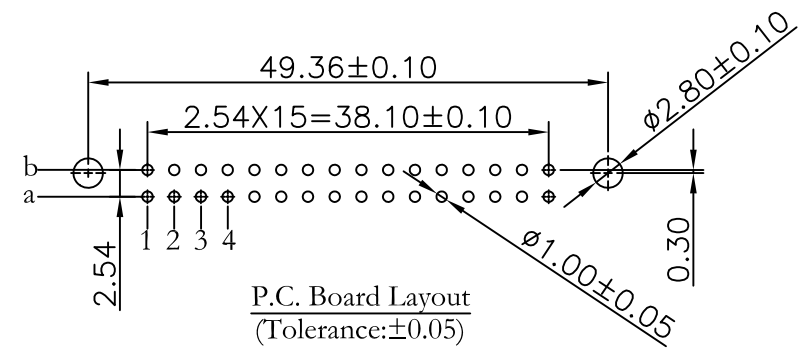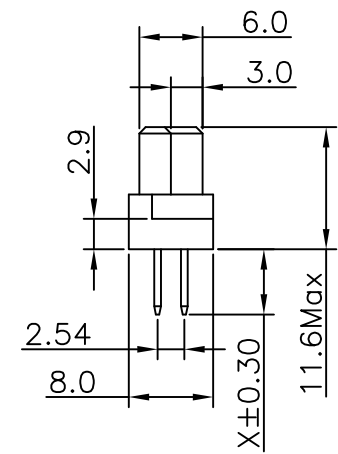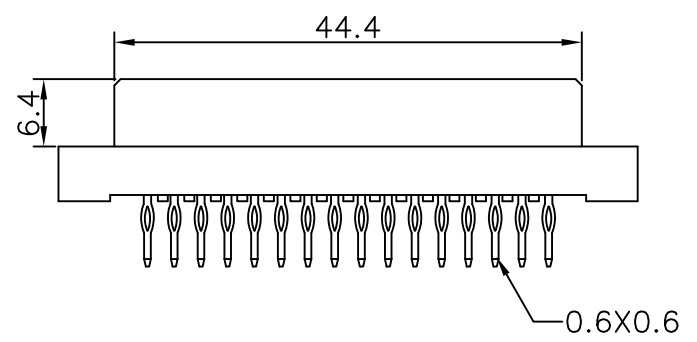

9001- 3 6 xx x C xx P A
 Series
 3: 2.54mm
 6: Female
 Position
 1: Dip Length
 2: Dip Length
 W1: Dip Length
 W2: Dip Length
 A: Tray Package
 P: Press Fit
 00: G/F
 10: 10u"
 15: 15u"
 30: 30u"
 C: Dip Tin Contact Gold
 G: Gold Plated

		X length		1	2	W1	W2
				4.6	6.3	13	17
Pitch	Position	Rows with Contacts		Contact Arrange			
2.54mm	32	a b					
	16	a -					

Tolerances	Dwg No.	9001D36002		Title: 9001 Series DIN41612 Half B Type Press Fit	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-36xxxCxxPA				
x = ±0.5	Projection				SHEET	1/1	Ver.No.	R2	
.x = ±0.25	Unit	mm	Scale						1:1
.xx = ±0.15	Drawn By	SH 08/20'20							