

REV.	SPECIFICATION	ECN NO.	APPD.





Material:

Cage: Cu-Ni Alloy, 20-50u" Nickel Plated..



Heat Sink: Aluminum.

Clip: Stainless Steel.

***RoHS Compliant**

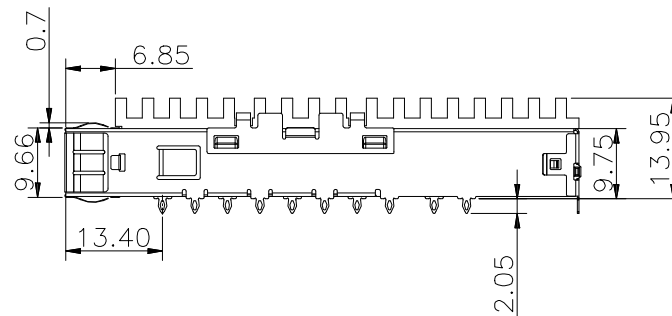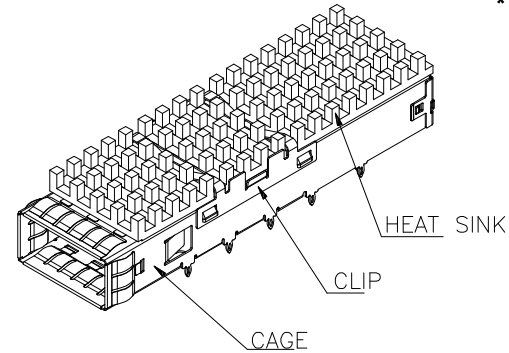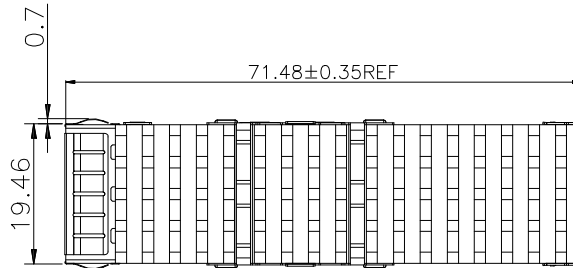


(After inserting the fiber optic plug
Increased by 1.00mmMax)

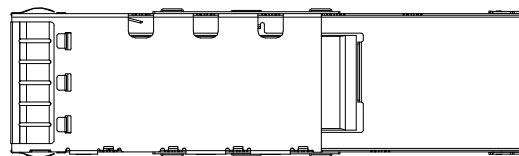



8959-A 1 P P 0 6 A
 Series 1:1 port
 P:Press Fit
 P:Spring Plus
 A: Tray Package
 6:With Heatsink 13.95mm
 0:Without Light Pipe

Tolerances	Dwg. No.	S1820231220-03		Title: 8959-A Series QSFP-DD Cage With Heatsink	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8959-A1PP06A SHEET 1/3 Ver.No. X1	
.x = ±0.35	Projection					
.xx = ±0.25	Unit	mm	Scale			1:N
.xxx = ±0.15	Drawn By	Martin 12/20'23				
① 665						


REV.	SPECIFICATION	ECN NO.	APPD.

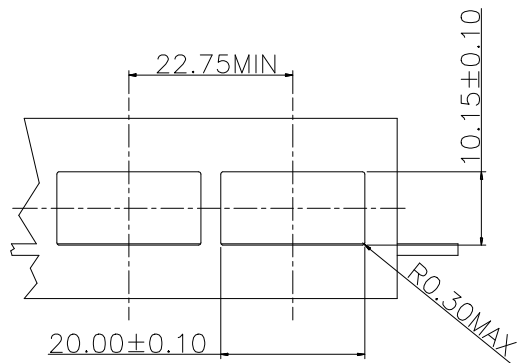

(BOTTOM OF CUT-OUT IN BEZEL TO TOP PCB)

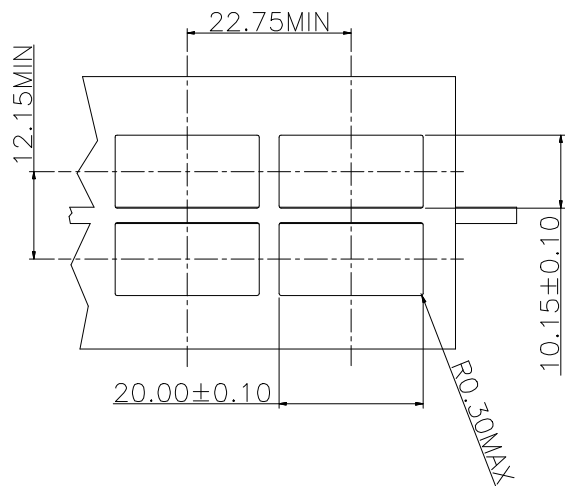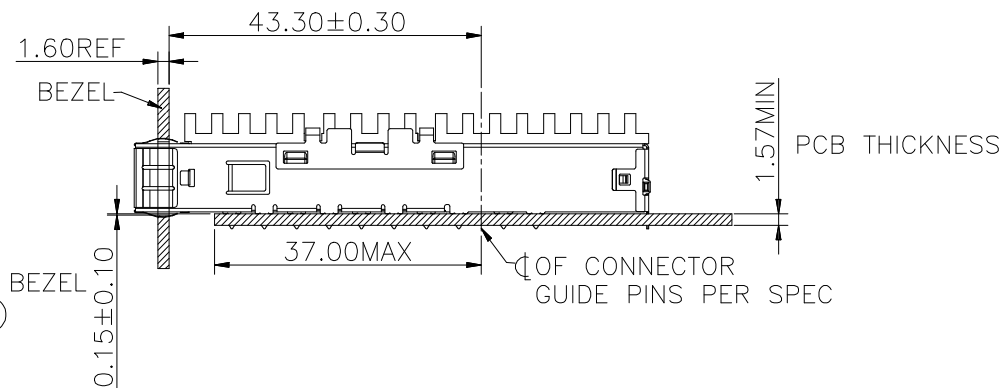

(BOTTOM OF CUT-OUT IN BEZEL TO TOP PCB)

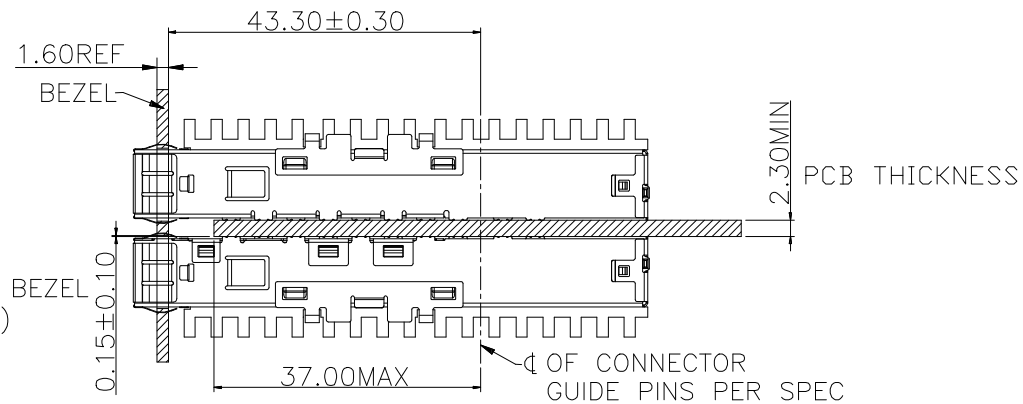

Tolerances	Dwg. No.	S1820231220-03		Title: 8959-A Series QSFP-DD Cage With Heatsink	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8959-A1PP06A				
.x = ±0.35	Projection								
.xx = ±0.25	Unit	mm	Scale		1:N				
.xxx = ±0.15	Drawn By	Martin 12/20'23							
					① 665	SHEET	2/3	Ver. No.	X1

