

REV.	SPECIFICATION	ECN NO.	APPD.
X1			

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper .

Au+Pd/Ni or Gold Plated on Contact Area and 80u" .

Tin Plated on Press Fit over Nickel 50u" .

Electrical Characteristics:

Current Rating: Power Pin 60 AMP.

Dielectric Withstanding Voltage: Power Pin :DC 1500V For 1 minute.

Insulator Resistance: 5000MΩ min.

Contact Resistance: Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+105°C .



*RoHS Compliant

Notes 1:


L: Low Power---PCB Mount 3.0mm Pitch

D: DC Power---PCB Mount 5.5mm Pitch

A: AC Power---PCB Mount 7.5mm Pitch

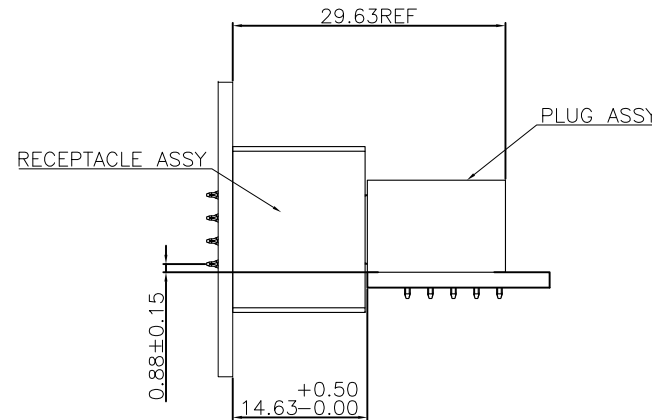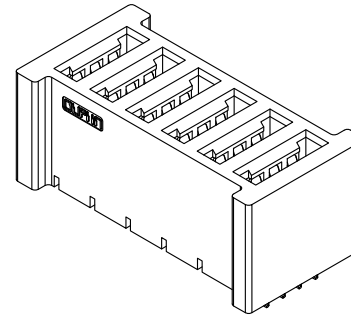

9395-	2	D06	B	7	2	P	N	G0	A
Series	2: Female Straight	Blank:Without Contact Axx, Dxx , Lxx No. of position	C: Selective Gold Plated B: Dip Tin Plated Contact Au+Pd/Ni Plated	7: 30u"	2:Without Rib	P: Press Fit Type	N: Without Post	G0: Without Guides	A: Tray Package

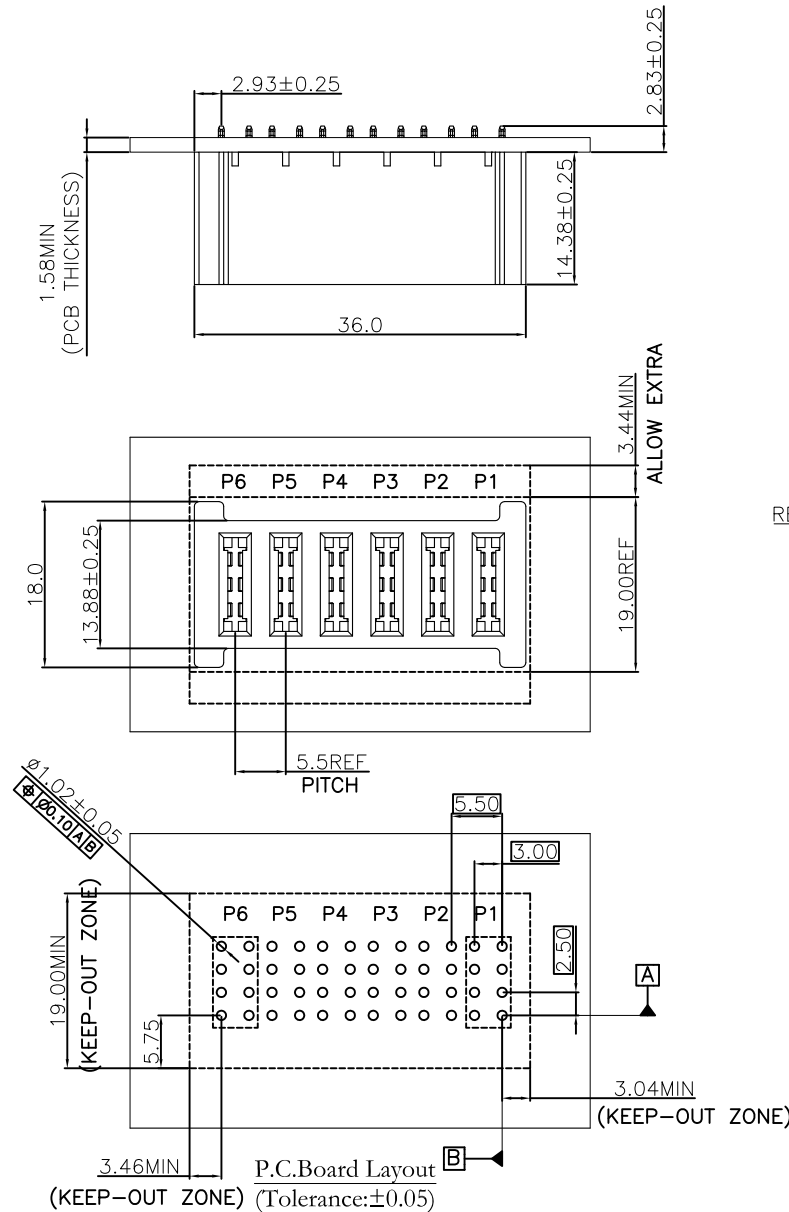

PROPOSAL ONLY

Tolerances	Dwg. No.	9395-D0000-050		Title: 9395 Series Max P60 10mm Low Profile, 60Amp Receptacle, Straight		OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N:9395-2D06B72PNG0A			
x = ±0.5	Projection								
.x = ±0.25	Unit	mm	Scale	1:1					
.xx = ±0.15	Drawn By	WP 01/20'21				SHEET	1/1	Ver. No.	X1