

REV.	SPECIFICATION	ECN NO.	APPD.
X1			

Material and Plating:

Housing: LCP, UL94V-0 , BLACK.

Power Contacts: High Conductivity Copper.

Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min

Tin Plated on Press Fit over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: Power Pin 60 AMP.

Dielectric Withstanding Voltage: DC 1500V For 1 minute.

Insulator Resistance: 5000MΩ min.

Contact Resistance: Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+105°C .


*RoHS Compliant

Notes 1:




L: Low Power---PCB Mount 3.0mm Pitch

D: DC Power---PCB Mount 5.5mm Pitch

A: AC Power---PCB Mount 7.5mm Pitch

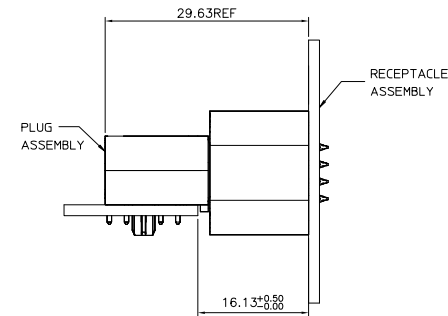

9395-	2	A12	B	7	2	P	N	G2	A
Series	2: Female Straight	Blank:Without Contact	Power Contact: Axx, Dxx , Lxx	No. of position	C:Selective Gold Plated	B: Dip Tin Plated	Contact Au+Pd/Ni Plated	7: 30u"	2:Without Rib
									A: Tray Package
									G2: Guides Side
									N: Without Post
									P: Press Fit Type

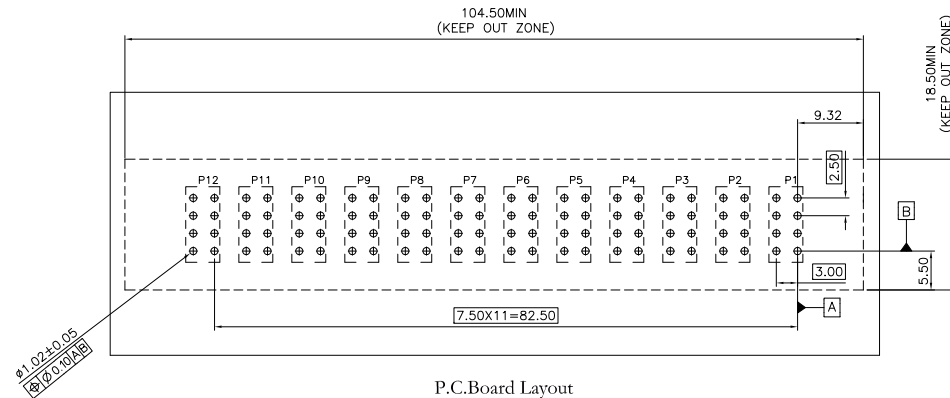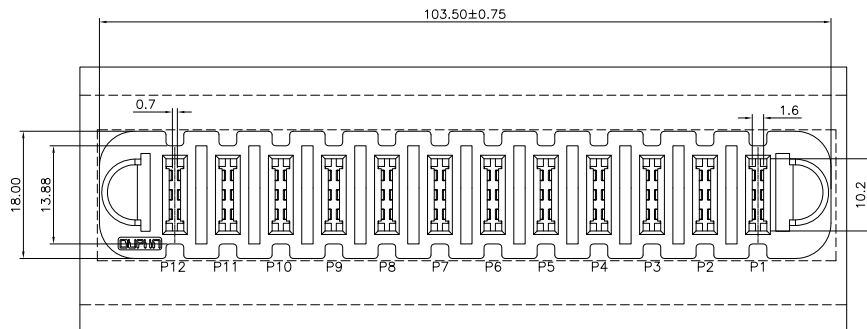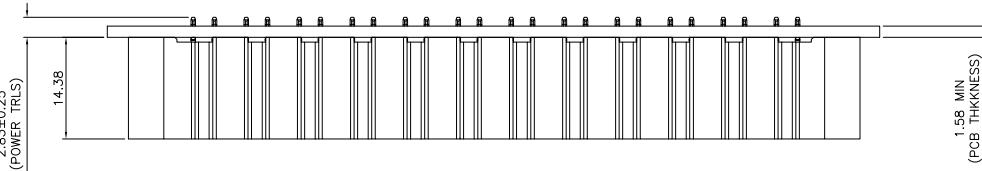

P.C.Board Layout
(Tolerance:±0.05)

PROPOSAL ONLY

Tolerances	Dwg. No.	9395-D0000-065		Title: 9395 Series Max P60 10mm Low Profile, 60Amp Receptacle, Straight		OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9395-2A12B72PNG2A				
x = ±0.5	Projection					SHEET				
.x = ±0.25	Unit	mm	Scale			1:1	1/1		Ver. No.	X1
.xx = ±0.15	Drawn By	WP 08/10'22								