


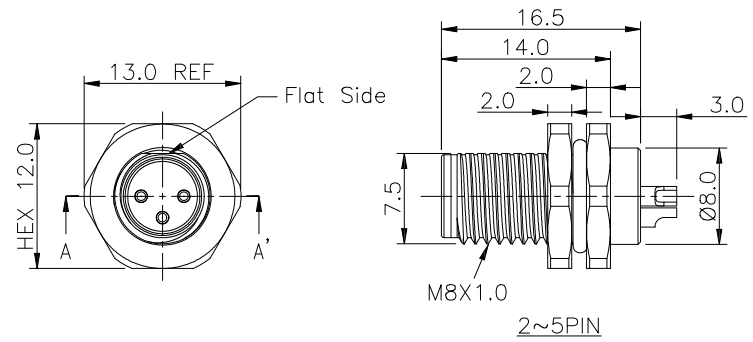


REV.	SPECIFICATION	ECN NO.	APPD.




Material:
Housing: PA66, UL94V-0, Black.
Contacts: Brass, Gold Plated over Nickel 100u".
Shell: Brass , 60u" Nickel Plated.
Nut: M8 Brass, 60u" Nickel Plated.
Seal Ring: Silicone, Red.

Electrical Characteristics:
Voltage Rating: 60V For 2~3Pin
30V For 4~8Pin
Current Rating: 3A For 2~5Pin
1A For 6~8Pin.
Dielectric Withstanding Voltage: 500V AC/Minute(2~5P).
250V AC/Minute(6~8P).
Insulation Resistance: 100MΩ min.
Contact Resistance: 5mΩ max.
Operating Temperature: -40°C~+100°C.

***RoHS Compliant**
***IP67**



Recommended Panel CUT-Out
Thickness:Max 3.5MM

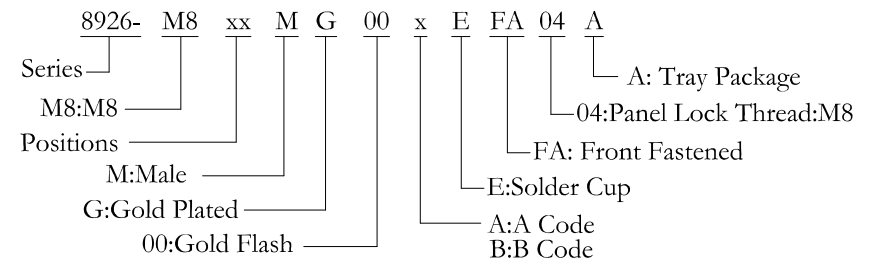

Pin Assignments Front View

B Code					
A Code					

Tolerances	Dwg. No.	S2620250519-01		Title:	8926 Series				
x. = ±0.3	Projection			M8 Waterproof Connector		OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
.x = ±0.2	Unit	mm	Scale	1:N		P/N: 8926-M8xxMG00xEFA04A			
.xx = ±0.15	Drawn By	Martin 05/19'25		Male Solder Cup Type		SHEET	1/1	Ver. No.	X1