

歐品電子(昆山)有限公司

OUPHIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包 裝 作 業 規 范)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(规范编号)	Q2321SPP-1374									PAGE	1/4	REV.	B
APPLICABLE CUSTOMER (適用客戶)	ALL	APPLICABLE PRODUCT (適用產品)	2321-AxxMCxxDRPT							PACKAGING CATEGORY (包裝方式)		TAPE REEL	

REVISE HISTORY (修 訂 履 歷)

REV.	ECN NO.	頁 次 PAGE									
		1	2	3	4						
A		NEW (新版發行)									
B		Add P/N (新增料號)									

DIVISION (事業單位)	Product Develop (產發部產品開發課)	APPROVED (核 准)		CHECKED (審 核)		PREPARED (制 表)	GYJ 10/08'25
-----------------	----------------------------	----------------	--	---------------	--	----------------	--------------

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET


PAGE 2/4 REV. B

SPEC.NO.(規範編號) Q2321SPP-1374




PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

Heat plastic-band packing manner 封帶包裝方式

The road hole must be laid at the right of the drawing direction.
(導向圓孔必須設在拉延方向的右側)

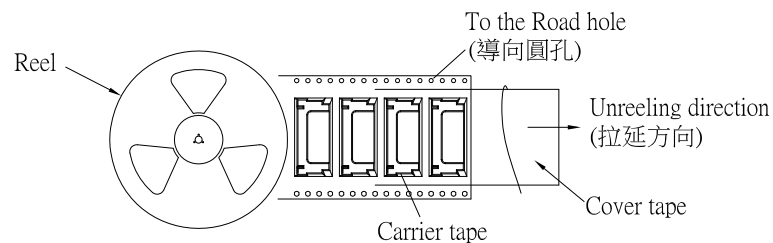

The begining of the band , the detailed chart of the end.
(封帶開始部分，結束部分的詳細圖)

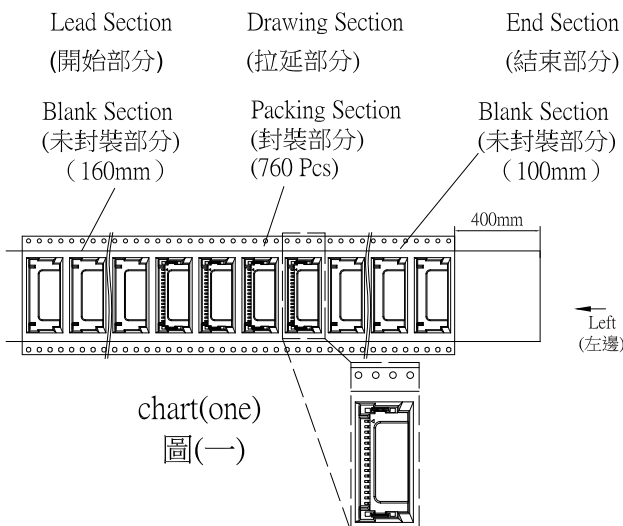

REMARK (備 注)

一.Packing of interior box: (內盒包裝方式)

(1) Packaging way of each reel is shown in drawing one.
(每個REEL包裝方式,如圖(一)所示)

★ Note : To carry on the positioning hole on the top of the product as reference, the product's GAP(Plastic openings) on the right (shown in drawing one.)
注意:以載帶定位孔在產品上面為參照，此時成品GAP(塑膠框口)在右邊(參考圖四)

(2) At the beginning of winding belt, take one part of sticky belt with 60 mm length, 15mm width, stick 20 mm on the material belt, stick 40 mm on the gap of the REEL mandrel, as shown in drawing two.
(在開始纏繞料帶時,取長60mm寬15mm之膠帶一段,20mm 黏于料帶上,40mm 黏于REEL心軸之缺口上,如圖(二)所示)

(3) Packing quantity per volume reference page 4.
(每捲可包裝數量參考第四頁)

(4) After winding the material belt, stick the COVER TAPE with 60 mm length, 15 mm width stick belt, and fix it on the circumference of the REEL, as shown in drawing three.
(料帶卷繞完成時取長60mm寬15mm之3M膠帶黏住COVER TAPE并將其固定在REEL之圓周上,如圖(三)所示)

*. Stick belt(18mm width,40 length) on the two sides when COVER TAPE is interrupted, stick each end with 20 mm belt to get them together, and the two COVER TAPE connected must be at the same line.
(COVER TAPE 有中斷時可用寬18mm,長40mm之膠帶將中斷之兩端各貼20mm,使其連接為一體,但連接后的兩段COVER TAPE應在同一直線上.)

歐品電子(昆山)有限公司

OUPHIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)



CONFIDENTIAL TOP SECRET

PAGE 3/4 REV. B

SPEC.NO.(規範編號) Q2321SPP-1374

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備注)

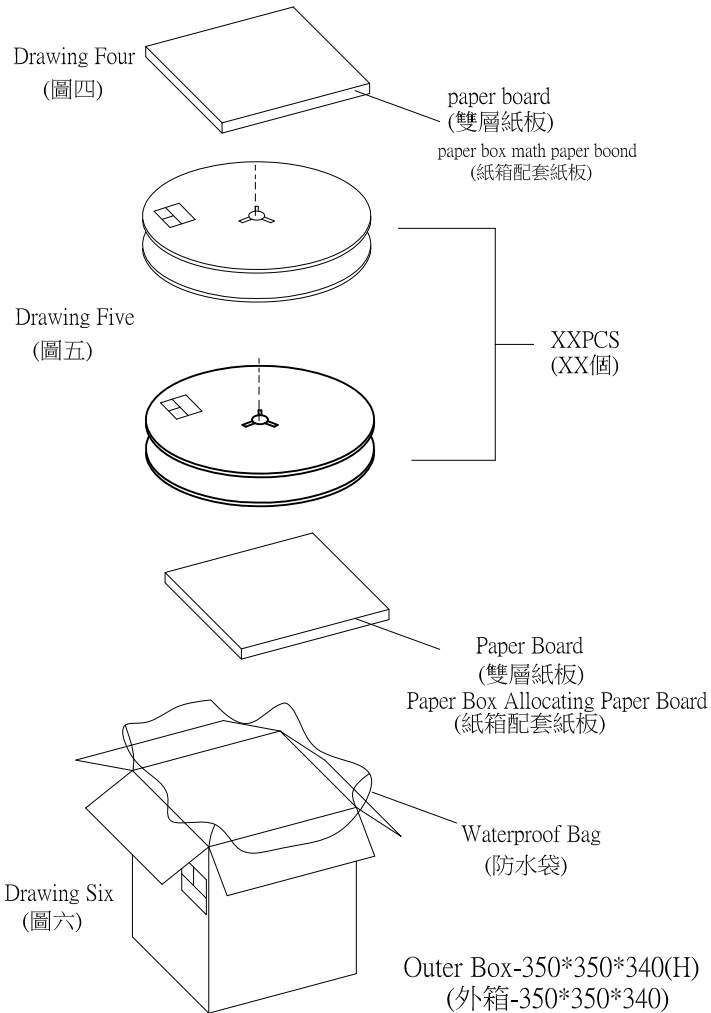

Drawing Seven (圖七)

2.Outer box packing mode: (二.外箱包裝方式)

- (1)Paper box(CT-1.5)1PCS(Drawing Six).
(紙箱CT-1.5 1PCS圖六).
- (2).Put 1pcs allocating paper board at the bottom of the box , then put 1 PCS waterproof bag on the board(Drawing Six).
(底層放入紙箱配套紙板1PCS.上面放入防水袋1PCS(圖六).
- (3).After folding XXpieces of reel disk, seal the waterproof bag(Drawing Five).
(疊好XX個Reel盤後封上防水袋圖五).
- (4).Put 1PCS double decked paper board on the top of box(Drawing Four).
(最上層放入雙層紙板1PCS圖四).
- (5)Seal the surface of the outer box (Drawing Seven).
(將外箱上層封口圖七).

*The form on the right and flank side of the box must be filled correctly and clearly,take actual testing weight as the standard of every box gross weight.

(*外箱之正面和側面所要填寫之項目要填寫正確,清晰,每箱之毛重應以實測重量為準.)

歐 品 電 子 (昆 山) 有 限 公 司													
OUPUIN ELECTRONIC(KUNSHAN) CO.,LTD.													
PACKAGING SPECIFICATION (包 裝 作 業 規 范)													
									☒ CONFIDENTIAL ☐ TOP SECRET				
SPEC.NO.(規 范 編 號)		Q2321SPP-1374							PAGE:	4/4	REV.	B	
PACKING MATERIAL (包 裝 材 料)				PRODUCT P/N	TAPE REEL STANDARD	PACKING P/N	ACKING N.W	PACKING QUANTITY (包 裝 數 量)		WEIGHT (重 量) kg			
MATERIAL NAME (材 料 名 稱)		PART NO.(料 號)	Q'TY	(產 品 料 號)	(包 材 規 格 mm)	(包 材 料 號)	(包 材 重 量)	PCS/REEL	REEL/BOX	PCS/BOX	N.W./PCS	N.W./BOX	G.W./BOX
PAPER BOXES (紙 箱)		CT-1.5	1	2321-A40MCxxDRPT	44	2321-K4044-001	3.97	760	6	4560	0.004	18.24	22.21
WATERPROOF BAG (防 水 袋)		100*70	1			COVER-K0044-001							
						REEL-K0044-001							
DOUBLE DECKED PAPER BOARD (雙 層 紙 板)		340*340*5	2	2321-A50MCxxDRPT	56	2321-K5056-002	3.72	760	5	3800	0.004	15.20	18.92
						COVER-K0056-001							
						REEL-K0056-001							
3M FIBER BELT (3M 纖 維 膠 帶)		-----	-----	2321-A80MCxxDRPT	72	2321-K8072-002	3.46	760	4	3040	0.004	12.16	15.62
						COVER-K0072-001							
						REEL-K0072-001							
DRYING AGENT (干 燥 劑)		-----	3	2321-A32MCxxDRPT	44	2321-K3244-001	3.97	760	6	4560	0.004	18.24	22.21
						COVER-K0044-001							
						REEL-K0044-001							

1.NOTE: (注 意) When the finished products have been made,take the actual weight as the standard of gross weight in each box. (成品出貨時,每箱之毛重應以實測重量為準) When the finished products have been made,stick the proper designation list on the box according to product demand. (成品出貨時,依據出貨要求貼上相對應的標籤單) It doesn't influence the manner of packing with the gold-plated way to print word way,Can amalgamate. (印字方式跟鍍金方式不影響包裝方式,可以共用)	2.NOTE: (注 意) *Pay attention to each big reel of material ,can be divided into 3 small reels,consumption of each big reel can't exceed 1meter, or the third reel can't be packed (來料每大卷 reel (carrier tape) 平均可分 3 小卷 reel , 每大卷 reel 消耗量不可超過 1 米 ,否則第三小卷不可包裝.)
--	--