

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包 裝 作 業 規 范)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(规范编号)	Q9392SPP-1053									PAGE	1/5	REV.	C
APPLICABLE CUSTOMER (適用客戶)	ALL	APPLICABLE PRODUCT (適用產品)	9392-2P04S24N1xCB30xA							PACKAGING CATEGORY (包裝方式)	TRAY PLATE PACKING		

REVISION HISTORY (修 訂 履 歷)

ECN NO. REV.	PAGE (頁 次)								
	1	2	3	4					
A	New Version 新版發行								
B	Modify the P/N 修改料号								
C	Add P/N 新增料号								

DIVISION (事業單位)	Product Develop (產品開發課)	APPROVED (核 准)		CHECKED (審 核)	DE: PE:	PREPARED (制 表)	GYJ 11/11'25
-----------------	-------------------------	----------------	--	---------------	---------	----------------	--------------

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.


PACKAGING SPECIFICATION (包 裝 作 業 規 范)

SPEC.NO.(规范编号) Q9392SPP-1053


CONFIDENTIAL TOP SECRET			
PAGE	2/5	REV.	C

PACKING OPERATION DIAGRAM & INSTRUCTION (包装作业图示及说明)


REMARK (備 注)

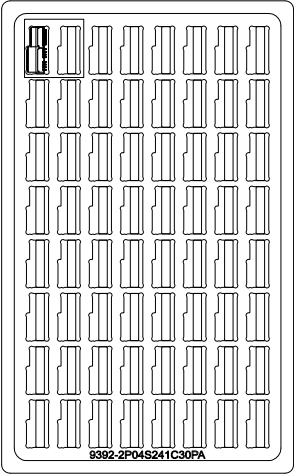

(Drawing 1-1)
(圖1-1)



(Drawing 1-2)
(圖1-2)

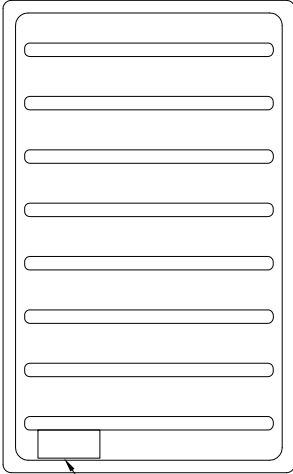

Batch label
批次標籤

(Drawing 2)
(圖2)

- 一.PET Plate Packing Mode:
(PET盤包裝方式)
- (1).CT-0.9 Box: PET-9392-001 xx PCS.
(CT-0.9規格的紙箱放PET-9392-001盤 xx PCS)
 - (2).Put product in each trough fully as shown in diagram.
(產品在盤子中擺放方式如圖所示)
 - (3).After filling each trough with product fully,cover it with transparent upper cover PET-9392-002 1PCS 。
The cover should be booked with the chassis together with the sticky tape, so as not to cause the products to fall scattered.
(每盤放滿產品後,加蓋透明上蓋 PET-9392-002 1PCS)
蓋子要與底盤用膠帶粘在一起, 以免造成產品散落。)
 - (4).The label of minimum supplies label (the design of the supplies label is such as Fig. 2) is stuck separately on each cover.
(在每個蓋子的上面分別貼批次標籤(樣式如圖2)。)
 - (5).Stack the xx PET plates filled with product, put them in the paper box in which has been put waterproof bag.
(將放滿產品的 xx 個PET盤疊起,裝入防水袋放入紙箱內)

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(規範編號) Q9392SPP-1053

PAGE

3/5

REV.

C

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備 注)

一.Outer Box Packing Mode:

(外箱包裝方式)

1. Fetching CT-0.9 1 carton, **xx** plates filled with the products are put, direction must unanimous, direction must unanimous, put one Air Column Bug in the upper and lower of the paper box , seal the other case upper strata.


取**CT-0.9**紙箱1個，將裝滿產品的**xx**個盤子放入，方向須一致，每箱上下各放一塊气柱袋，將外箱上層封口。

2. Need to paste supplies label 1PCS like Fig. 8 each carton terminal surface upper right corner, see Fig. 7 in label design of the supplies . When yard is shown in the carton, the supplies label needs to expose; With criticize and paste the position and need unanimity with the code goods supplies label, when the carton terminal surface space is insufficient, can paste the upper right corner to the side of the carton .Need to stick 1PCS of certificate of quality on each carton terminal surface.


每個紙箱端面右上角需粘貼物料標籤1PCS如圖8，物料標籤樣式見圖7。紙箱碼放時，物料標籤需外露；同批同編碼貨物物料標籤粘貼位置需一致，如紙箱端面空間不足時，可粘貼在紙箱側面右上角。在每個紙箱端面需要貼合格証**1PCS**。



(Drawing 4)
(圖4)

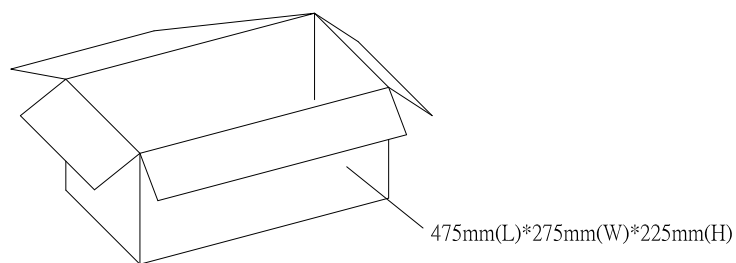

(Drawing 5)
(圖5)



(Drawing 6)
(圖6)

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(規範編號) Q9392SPP-1053

PAGE

4/5

REV.


C

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)


REMARK (備 注)

100	編碼(ITEM):	
70	描述(DESCRIPTION):	
	廠家型號:(MODEL):	
	數量(QTY):	
	代碼(CODE):	
	合約號(PO NO):	
	批次號(LOT NO):	
	日期(DATE):	
	原產地 (Country of Origin) :	
	備注(NOTES):	

Supplies label
物料標籤
(Drawing 7)
(圖7)

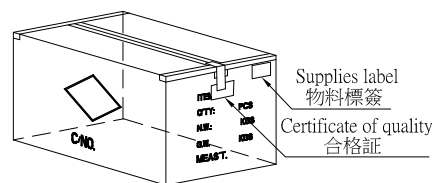

(Drawing 8)
(圖8)

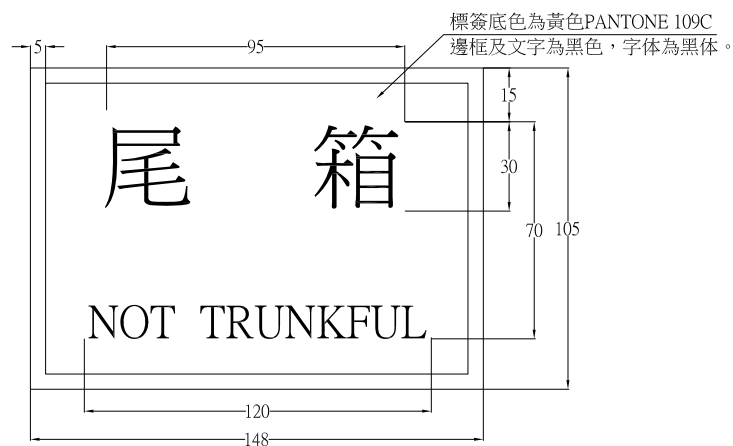

(Drawing 9)
(圖9)

一.Outer Box Packing Mode: (外箱包裝方式)

3. Need to each paste the boot 1 label on two terminal surfaces of carton when the quantity of the supplies is less than all over case and pack the quantity into normally in the carton: First one is stuck below the supplies label, another one is its on the opposite side. The label design of the boot is seen and pursued (9). The bottom of the label is yellow PANTONE 109C, the frame and characters are black, the script is the boldface.

紙箱內物料數量少于滿箱正常裝入數量時，需在紙箱兩端面各粘貼尾箱標籤1個：其一個貼于物料標籤下方,另一個在其對面。尾箱標籤樣式見圖（9）。標籤底色為黃色PANTONE 109C，邊框及文字為黑色，字體為黑體。

The form on the right and flank side of the box must be filled correctly and clearly,take actual testing weight as the standard of each box gross weight,Error value should be in 3% Less than .

外箱之正麥和側麥所要填寫之項目要填寫正確，清晰，每箱之毛重應以實測重量為準，誤差值要在3%以內。

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

■CONFIDENTIAL

□TOP SECRET

SPEC. NO. (規範編號)

Q9392SPP-1053

PAGE:

5/5

REV.

C

PACKING MATERIAL (包裝材料)

PRODUCT P/N

CT NO.

PACKING N.W

PACKING QUANTITY (包裝數量)

WEIGHT (重量) kg

MATERIAL NAME
(材料名稱)

PART NUMBER
(料號)

Q' TY

(產品料號)

(紙箱規格) (包材重量)

PCS/TRAY

TRAY/BOX

PCS/BOX

N. W. /PCS

N. W. /BOX

G. W. /BOX

PAPER BOXES (紙箱)

CT-0.9

1

9392-2P04S24N11CB30xA

CT-0.9

4.49

64

14

896

0.00657

5.89

10.37

Packing Box
(包裝盒)

PET-9392-001

9392-2P04S24N13CB30DA

CT-0.9

4.49

64

14

896

0.00657

5.89

10.38

Packing Box Cover
(包裝盒蓋子)

PET-9392-002

WATERPROOF BAG
(防水袋)

PE 100*90

1

Air Column Bag
(氣柱袋)

2

DRYING AGENT
(干燥劑)

3

1. NOTE:
(注意)

When the finished products have been made, take the actual weight as the standard of gross weight in each box. (成品出貨時, 每箱之毛重應以實測重量為準)

When the finished products have been made, stick the proper designation list on the box according to product demand. (成品出貨時, 依據出貨要求貼上相對應的標籤單)

It doesn't influence the manner of packing with the gold-plated way to print word way, Can amalgamate. (印字方式跟鍍金方式不影響包裝方式, 可以共用)