
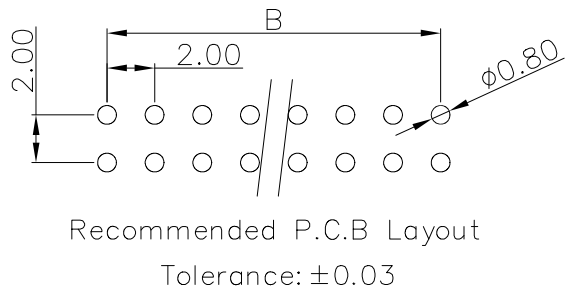
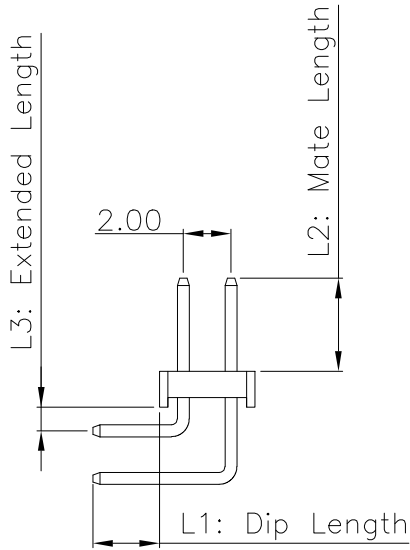


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA10T, UL94V-0, Black.
Contacts: Brass, Gold Plated or Tin Plated over Nickel 50u".
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V for 1 minute.
Insulation Resistance: 1000M Ω min.
Contact Resistance: 20m Ω max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

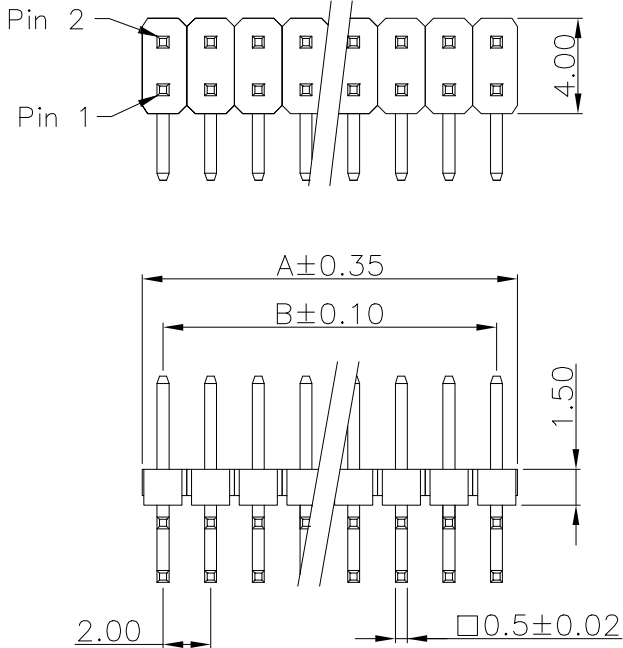

Standard item:
ie: 2111-A2XxxG00RB (Dip 2.80mm, Mate 3.90mm, Extended 1.00mm)
Custom item:
ie: 2111-A2XxxG00R-3-6-1B(2111-A2XxxG00R-L1-L2-L3B)
3.0mm Dip Length (increment of 0.1mm)
6.0mm Mate Length (increment of 0.1mm)
1.0mm Extended Length (increment of 0.1mm)

Series 2111-A 2 X xx x xx R B
Double Row
No. of Pin Per Row
G:Gold Plated
T:Tin Plated
B: Bulk Package
R: Right Angle Type
00: Gold Flash
10: 10u"
15: 15u"
30: 30u"
Blank: For Tin Plated

Dimension					
Positions	A	B	Positions	A	B
2X02	3.75	2.00	2X22	43.75	42.00
2X03	5.75	4.00	2X23	45.75	44.00
2X04	7.75	6.00	2X24	47.75	46.00
2X05	9.75	8.00	2X25	49.75	48.00
2X06	11.75	10.00	2X26	51.75	50.00
2X07	13.75	12.00	2X27	53.75	52.00
2X08	15.75	14.00	2X28	55.75	54.00
2X09	17.75	16.00	2X29	57.75	56.00
2X10	19.75	18.00	2X30	59.75	58.00
2X11	21.75	20.00	2X31	61.75	60.00
2X12	23.75	22.00	2X32	63.75	62.00
2X13	25.75	24.00	2X33	65.75	64.00
2X14	27.75	26.00	2X34	67.75	66.00
2X15	29.75	28.00	2X35	69.75	68.00
2X16	31.75	30.00	2X36	71.75	70.00
2X17	33.75	32.00	2X37	73.75	72.00
2X18	35.75	34.00	2X38	75.75	74.00
2X19	37.75	36.00	2X39	77.75	76.00
2X20	39.75	38.00	2X40	80.00	78.00
2X21	41.75	40.00			

Tolerances	Dwg. No.	S3220231122-02	
.x = ±0.30 .xx = ±0.20	Projection		
	Unit	mm	Scale 1:N
	Drawn By	Martin 12/26'25	

Title: 2111-A Series
Pin Header 2.0mmX2.0mm
Double Row
Right Angle Solder Type

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2111-A2XxxxxxRB			
SHEET	1/1	Ver.No.	X3