
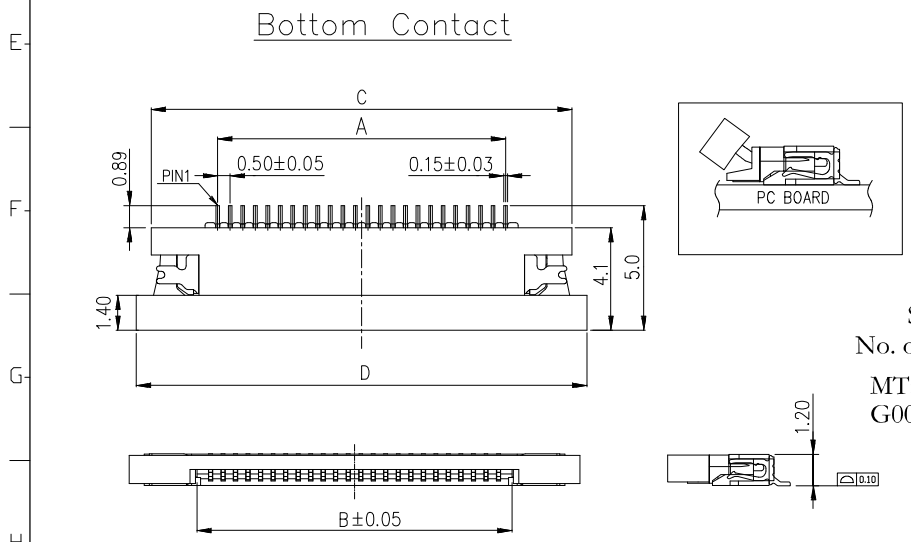
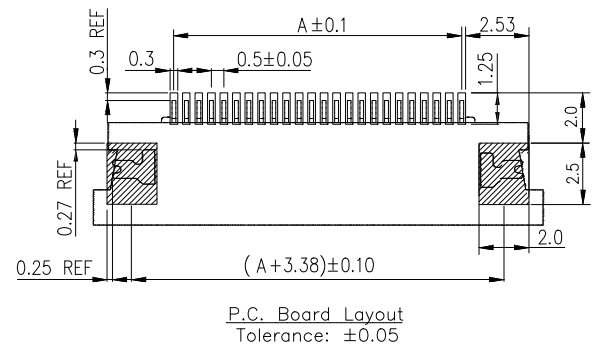

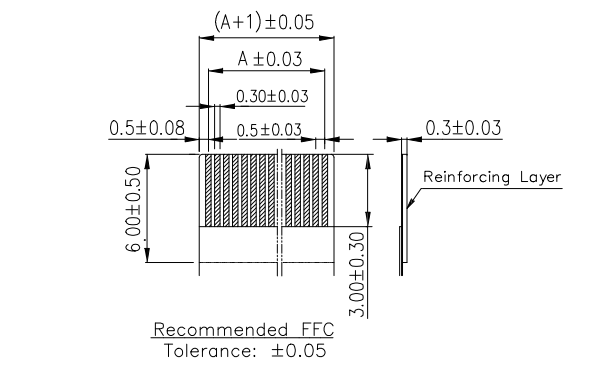


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: LCP, UL94V-0, Natural.
Locker: LCP, UL94V-0, Black.
Contacts: Phosphor Bronze, 100u" Matte Tin Plated or Gold Plated over Nickel 50u".
Solder Tab: Brass, Tin Plated.
Electrical Characteristics:
Current Rating: 0.5A DC.
Voltage Rating: 50V AC.
Dielectric Withstanding Voltage: AC 500V.
Insulation Resistance: 500MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -45°C~+85°C.
***RoHS Compliant**

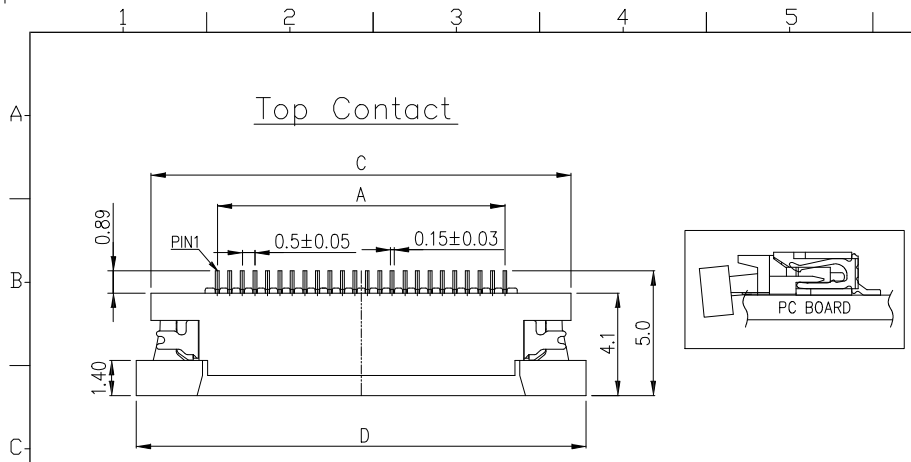

Series 2346-E xx xxx D x T
No. of Pin Count
MT:Matte Tin Plated
G00:Gold Flash Plated
D:SMD Type
T:Tape & Reel Package
1.Top Contact
2.Bottom Contact

Dimension											
Positions	A	B	C	D	Positions	A	B	C	D	Positions	A
04	1.50	2.58	6.80	8.00	33	16.00	17.08	21.30	22.50		
05	2.00	3.08	7.30	8.50	34	16.50	17.58	21.80	23.00		
06	2.50	3.58	7.80	9.00	35	17.00	18.08	22.30	23.50		
07	3.00	4.08	8.30	9.50	36	17.50	18.58	22.80	24.00		
08	3.50	4.58	8.80	10.00	37	18.00	19.08	23.30	24.50		
09	4.00	5.08	9.30	10.50	38	18.50	19.58	23.80	25.00		
10	4.50	5.58	9.80	11.00	39	19.00	20.08	24.30	25.50		
11	5.00	6.08	10.30	11.50	40	19.50	20.58	24.80	26.00		
12	5.50	6.58	10.80	12.00	41	20.00	21.08	25.30	26.50		
13	6.00	7.08	11.30	12.50	42	20.50	21.58	25.80	27.00		
14	6.50	7.58	11.80	13.00	43	21.00	22.08	26.30	27.50		
15	7.00	8.08	12.30	13.50	44	21.50	22.58	26.80	28.00		
16	7.50	8.58	12.80	14.00	45	22.00	23.08	27.30	28.50		
17	8.00	9.08	13.30	14.50	46	22.50	23.58	27.80	29.00		
18	8.50	9.58	13.80	15.00	47	23.00	24.08	28.30	29.50		
19	9.00	10.08	14.30	15.50	48	23.50	24.58	28.80	30.00		
20	9.50	10.58	14.80	16.00	49	24.00	25.08	29.30	30.50		
21	10.00	11.08	15.30	16.50	50	24.50	25.58	29.80	31.00		
22	10.50	11.58	15.80	17.00	51	25.00	26.08	30.30	31.50		
23	11.00	12.08	16.30	17.50	52	25.50	26.58	30.80	32.00		
24	11.50	12.58	16.80	18.00	53	26.00	27.08	31.30	32.50		
25	12.00	13.08	17.30	18.50	54	26.50	27.58	31.80	33.00		
26	12.50	13.58	17.80	19.00	55	27.00	28.08	32.30	33.50		
27	13.00	14.08	18.30	19.50	56	27.50	28.58	32.80	34.00		
28	13.50	14.58	18.80	20.00	57	28.00	29.08	33.30	34.50		
29	14.00	15.08	19.30	20.50	58	28.50	29.58	33.80	35.00		
30	14.50	15.58	19.80	21.00	59	29.00	30.08	34.30	35.50		
31	15.00	16.08	20.30	21.50	60	29.50	30.58	34.80	36.00		
32	15.50	16.58	20.80	22.00							

Tolerances	Dwg. No.	2346D00004	Title:					
.x = ±0.30	Projection							
.xx = ±0.20	Unit	mm	Scale	1:N	OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
.xxx = ±0.10	Drawn By	Martin 07/07'26	525A		P/N: 2346-ExxxxxDxT			
					SHEET	1/1	Ver.No.	A1