

Materials:

Cover: Thermoplastic.

Pull Latch: Nylon(Color: Sky Blue)

PCB: FR-4.

Weave: Plastic Braid Sleeve PET.

Cable: 30AWG-34AWG(2C+2D)+AM.

IMPEDANCE:


85 Ohm and 100 Ohm Impendace are Optional.

This Product Used SAS 3.0/4.0, PCIe Gen3/Gen4**Test Conditions:**1. 100% Open & Short & Miss-Wiring
& Intermittence Test.

2. Conductive Resistance: 3Ω Max.




3. Insulation Resistance: 100 MΩ.

4. Hi-POT Test: 300VDC For 10ms.

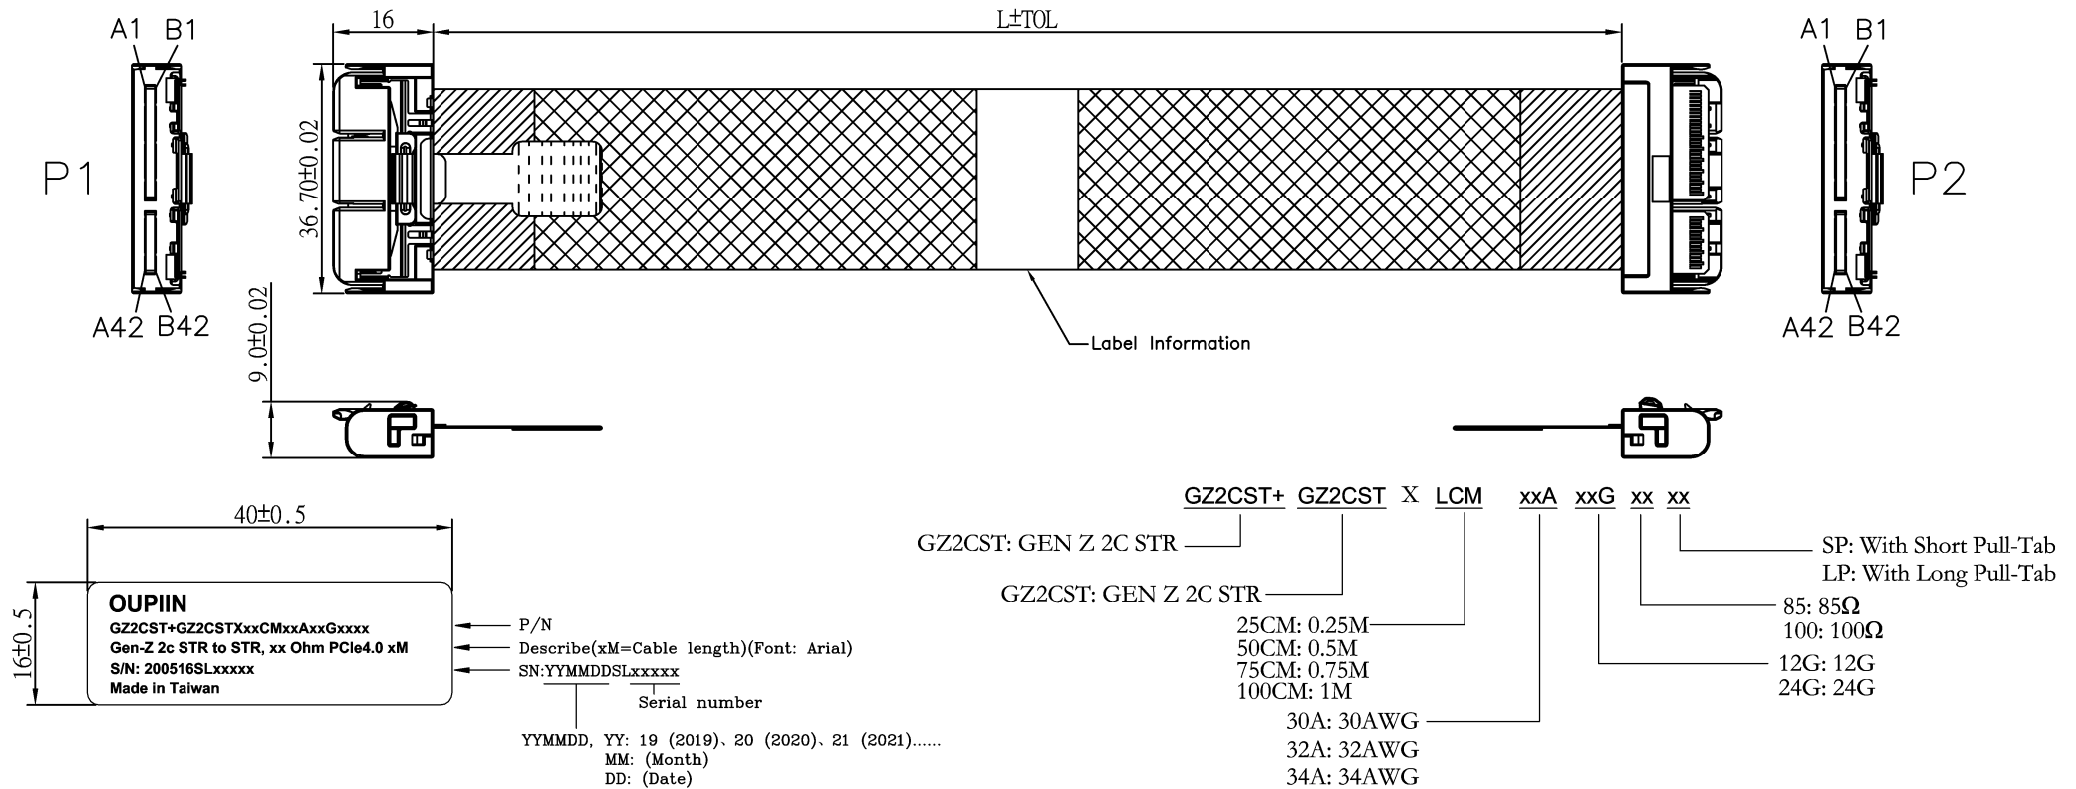RoHs Compliant

Tolerances(Cable Total Length)	Drawn No.	S2220200407-04		Part No.		 OUPIIN ENTERPRISE CO., LTD.					
± 5 (0~500mm)	Projection			GZ2CST+GZ2CSTXLCMxxAxxGxxxx							
± 10 (501~1000mm)	Unit	mm	Scale	1:N		Title: Gen-Z, 2C, STR to STR Cable Assembly, PCIe4.0		SHEET	1/2	Ver. No.	X2
± 20 (1001~2000mm)	Drawn By	Jerry 06/16'20		① 679							
± 40 (2001mm~xxxx)											

WIRING TABLE

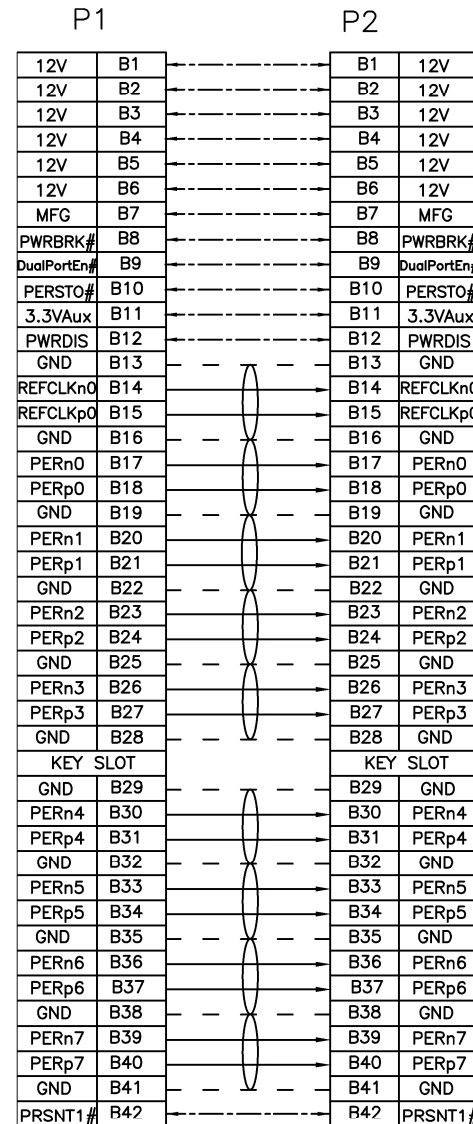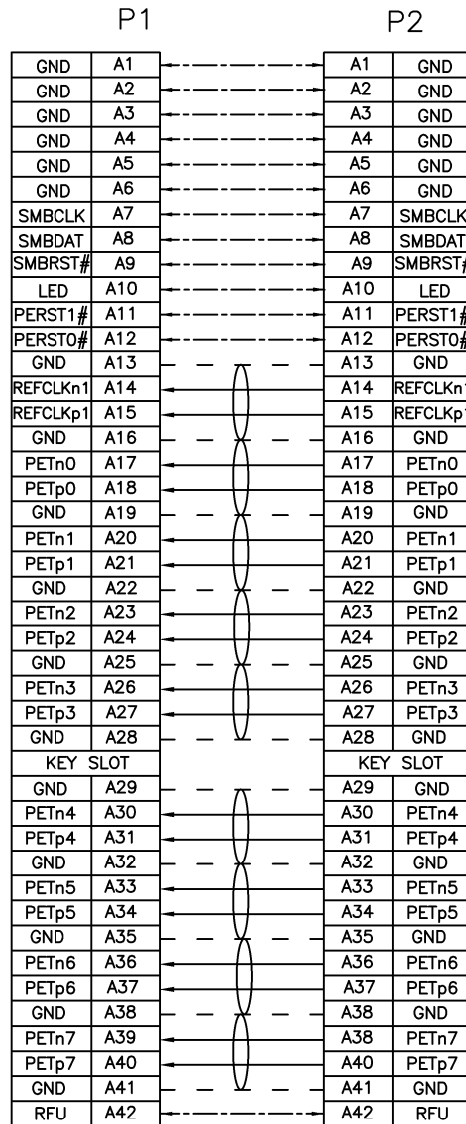

Tolerances(Cable Total Length)	Drawn No.	S2220200407-04	Part No.			
± 5 (0~500mm)	Projection		GZ2CST+GZ2CSTXLCMxxAxxGxxxx			
± 10 (501~1000mm)	Unit mm	Scale	1:N	Title:	Gen-Z, 2C, STR to STR	
± 20 (1001~2000mm)	Drawn By	Jerry	06/16'20	① 679	Cable Assembly, PCIe4.0	
± 40 (2001mm~xxxx)						

OUPIN ENTERPRISE CO., LTD.		
SHEET	2/2	Ver. No. X2