

Materials:

Cover: PC+ABS, 30%G.F.

PCB: FR-4.

Weave: Plastic Braid Sleeve PET.

Cable: 30AWG-34AWG(2C+2D)+AM.

IMPEDANCE:


85 Ohm and 100 Ohm Impendence are Optional.

This Product Used SAS 3.0/4.0, PCIe Gen3/Gen4**Test Conditions:**1. 100% Open & Short & Miss-Wiring
& Intermittence Test.

2. Conductive Resistance: 3Ω Max.

3. Insulation Resistance: 100 MΩ.

4. Hi-POT Test: 300VDC For 10ms.

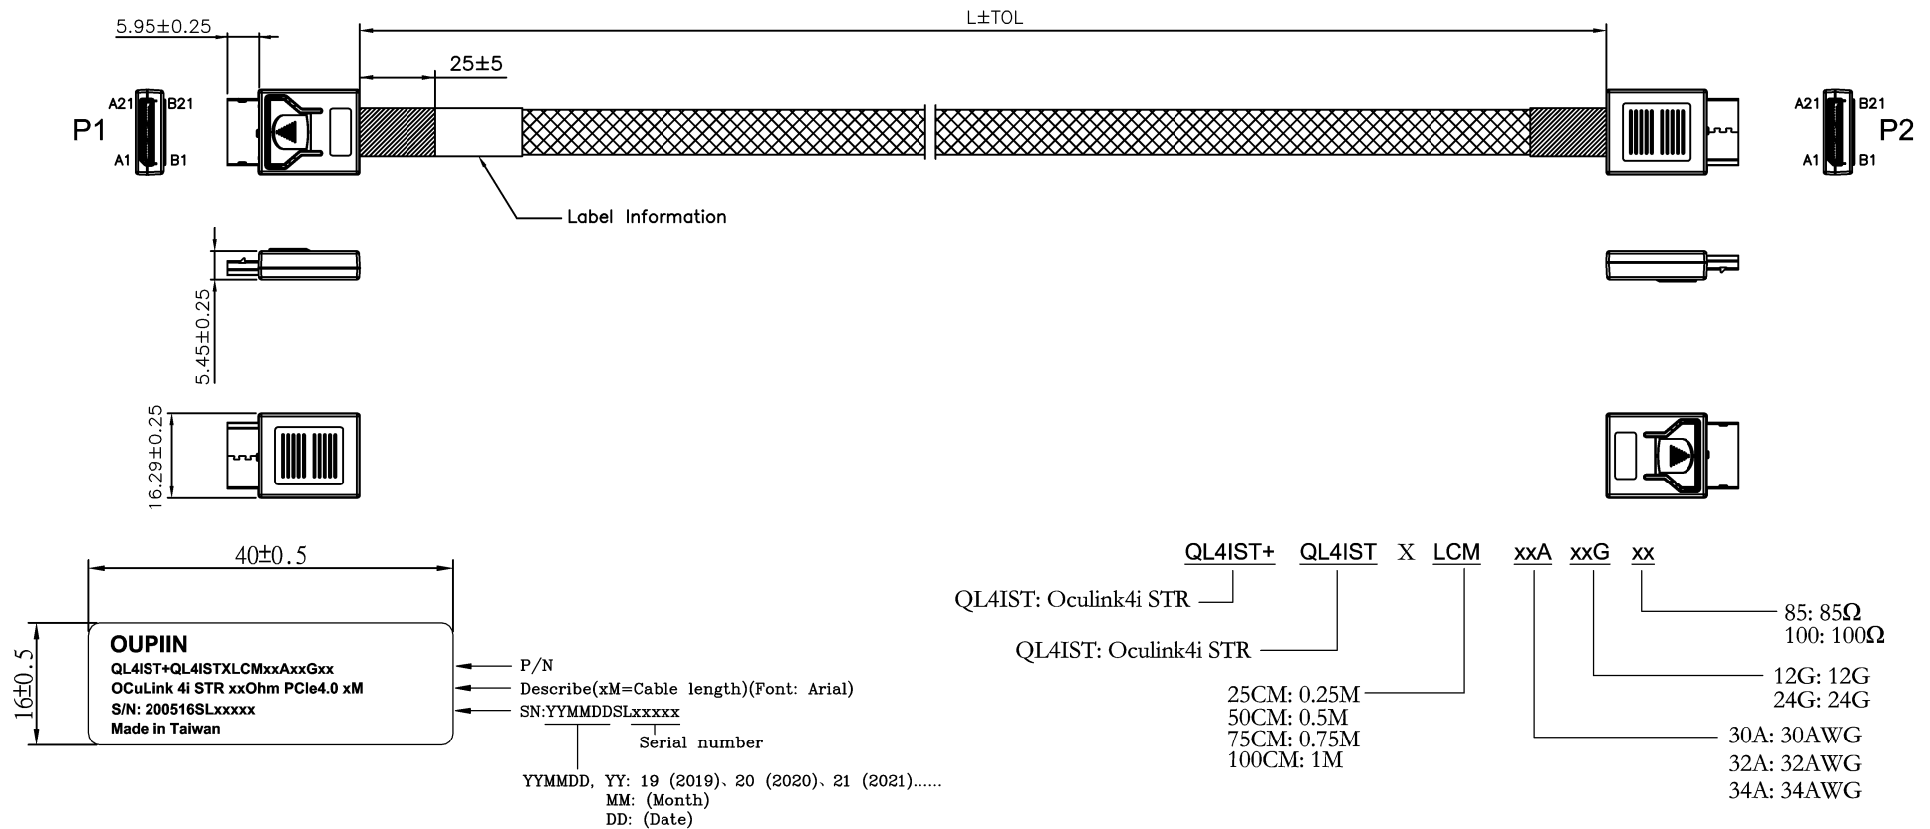
RoHs Compliant

Tolerances(Cable Total Length)	Drawn No. S2220200407-07		Part No. QL4IST+QL4ISTXLCMxxAxxGxx		OUPIN ENTERPRISE CO., LTD.		
	Projection	Unit mm	Scale	1:N			
± 5 (0~500mm)					Title: OCuLink, 4i, STR to STR ① 679 Cable Assembly, PCIe4.0	SHEET	1/2
± 10 (501~1000mm)							
± 20 (1001~2000mm)							
± 40 (2001mm~xxxx)	Drawn By	Jerry	06/16'20			Ver. No.	X2

WIRING TABLE

P1

P2

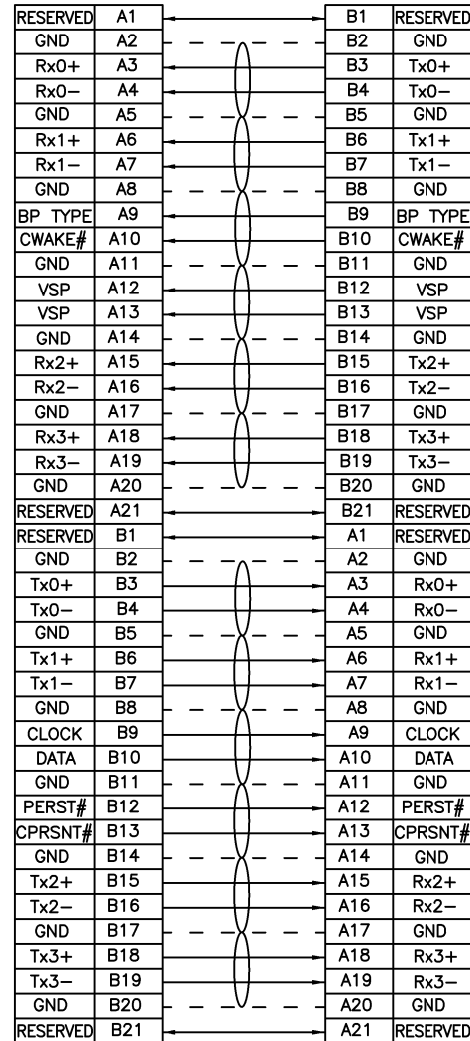

Tolerances(Cable Total Length) ± 5 (0~500mm) ± 10 (501~1000mm) ± 20 (1001~2000mm) ± 40 (2001mm~xxxx)	Drawn No.	S2220200407-07		Part No.	OUPIIN ENTERPRISE CO., LTD.		
	Projection			QL4IST+QL4ISTXLCMxxAxxGxx Title: OCuLink, 4i, STR to STR			
	Unit mm	Scale	1:N	① 679 Cable Assembly, PCIe4.0			
	Drawn By	Jerry 06/16'20			SHEET	2/2	Ver. No. X2