

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包 裝 作 業 規 范)

☒ CONFIDENTIAL☐ TOP SECRET

PAGE

1/4

REV.

E

PACKAGING CATEGORY
(包裝方式)

TRAY PLATE PACKING

SPEC.NO.(規範編號)

Q9192SPP-1108

APPLICABLE CUSTOMER
(適用客戶)

ALL

APPLICABLE PRODUCT
(適用產品)

9192-BBC4B001
9192-BBC4B002

9192-BBNA001
9192-BBNA002

REVISION HISTORY (修 訂 履 歷)

ECN REV.	NO	PAGE (頁 次)								
		1	2	3	4					
A		New (新版)								
B		Modify Packaging Quantity (改變包裝數量)								
C		Modify part number and carton specification (修改料号与纸箱规格)								
D		Tray update,EPE updated to air column bag (盘子更新,珍珠棉更新为气柱袋)								
E		Increase P/N (新增料号)								

DIVISION
(事業單位)

Product Development
(產品開發課)

APPROVED
(核 准)

CHECKED
(審 核)

PE:
DE:

PREPARED
(制 表)

XS 05/18'26


歐品電子(昆山)有限公司

OUPHIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒ CONFIDENTIAL ☐ TOP SECRET	
PAGE	2/4
REV.	E

SPEC.NO.(規範編號) Q9192SPP-1108

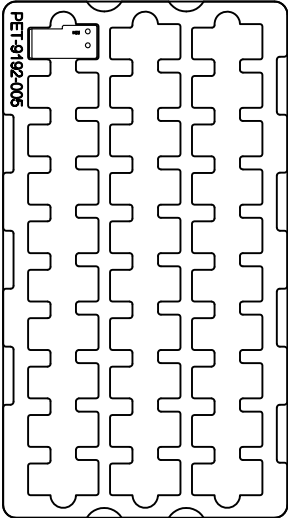PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)	REMARK (備 注)
Laying Product Diagram: (產品擺放圖示) 	一.PET Plate Packing Mode: (PET盤包裝方式) (1).CT-0.5 Box:PET-9192-005 XX PCS. (CT-0.5 規格的紙箱放盤PET-9192-005 XX PCS) (2).Put product in each trough fully as shown in diagram. (產品在盤子中擺放方式如圖所示)

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(規範編號) Q9192SPP-1108

PAGE



3/4

REV.

E

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備 注)

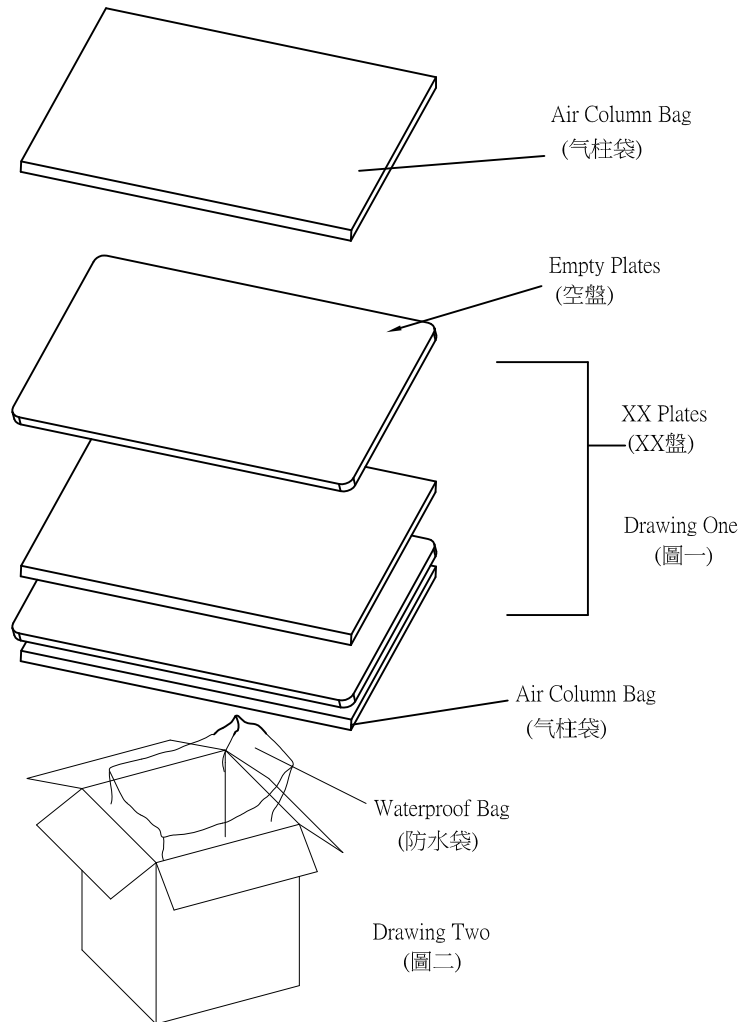

一.Outer Box Packing Mode:

(外箱包裝方式)

- (1).Paper box 0.5 standard 1 PCS,as shown in drawing Two.
(紙箱 0.5 規格 1 PCS.如(圖二)所示)
- (2).Put one Air Column Bag in the upper and lower of the paper box,,2PCS in all.,as shown in drawing One.
(每箱上下各放一個气柱袋,共2PCS , 如(圖一)所示)
- (3).Put 1 PCS waterproof in the paper box,as shown in drawing Two.
(紙箱內側放入防水袋 1 PCS.如(圖二)所示)
- (4).Piled the XX packing plates packed up in the waterproof.
(將放滿產品的XX個PET盤疊起,裝入防水袋內)
- (5).Seal the waterproof bag,then put the Air Column Bag 1PCS on the bag.
if box can not be fullled ,filled with ploy.
(Put 1 PCS Air Column Bag at the right and left side in the paper box if it is necessary.)
封上防水袋後,放上第二塊气柱袋,未填滿處用气柱袋填滿.
(必要時,在紙箱的左右兩側各放一塊气柱袋)
- (6).Seal the surface of the outer box,as shown in drawing Three.
(將外箱上層封口.如(圖三)所示)

The form on the right and flank side of the box must be filled correctly and clearly,take actual testing weight as the standard of each box gross weight.

外箱之正麥和側麥所要填寫之項目要填寫正確,清晰,每箱之毛重應以實測重量為準.

歐品電子(昆山)有限公司

OUPHIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒CONFIDENTIAL☐TOP SECRET

PAGE:

4/4

REV.

E

SPEC.NO.(規範編號)			Q9192SPP-1108								
PACKING MATERIAL (包裝材料)			PRODUCT P/N	CT NO.	PACKING N.W.	PACKING QUANTITY (包裝數量)			WEIGHT (重量) kg		
MATERIAL NAME (材料名稱)	PART NO. (料號)	Q'TY	(產品料號)	(紙箱規格)	(包材重量)	PCS/TRAY	TRAY/BOX	PCS/BOX	N.W./PCS	N.W./BOX	G.W./BOX
PAPER BOXES (紙箱)	CT-0.5	1	9192-BBC4B001	CT-0.5	3.98	30	5	150	0.0435	6.53	10.51
Packing Box (包裝盒)	PET-9192-005	5									
Packing Box Cover (包裝盒蓋子)	-----	0	9192-BBC4B002	CT-0.5	3.98	30	5	150	0.0435	6.53	10.51
			9192-BBNA001	CT-0.5	3.98	30	5	150	0.0435	6.53	10.51
WATERPROOF BAG (防水袋)	-----	1	9192-BBNA002	CT-0.5	3.98	30	5	150	0.0435	6.53	10.51
Air Column Bag (氣柱袋)	-----	2									
DRYING AGENT (干燥劑)	-----	3									

1.NOTE:
(注意)
When the finished products have been made,take the actual weight as the standard of gross weight in each box.
(成品出貨時,每箱之毛重應以實測重量為準)
When the finished products have been made,stick the proper designation list on the box according to product demand
(成品出貨時,依據出貨要求貼上相對應的標籤單)