
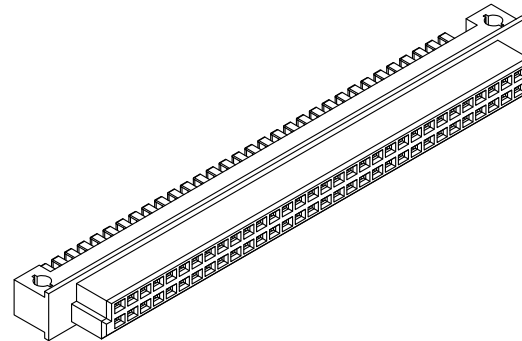


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN260935	

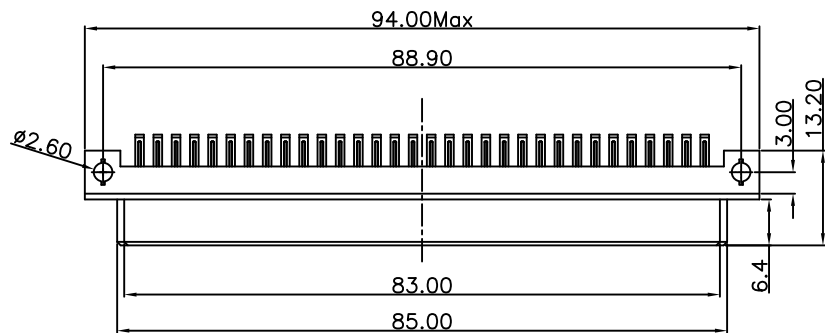



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.


Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

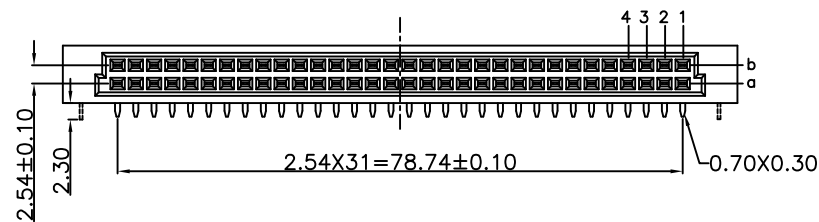

9001-C 3 4 xx 1 C xx L1 A
 Series
 3: 2.54mm
 4: 5.08mm
 Female
 No. of Position
 1: Dip Length
 A: Tray Package
 Blank: W/O Lock
 L1: With Lock
 00: G/F
 10: 10μ"
 15: 15μ"
 30: 30μ"
 C: Dip Tin Plated
 Contact Gold Plated
 G: Gold

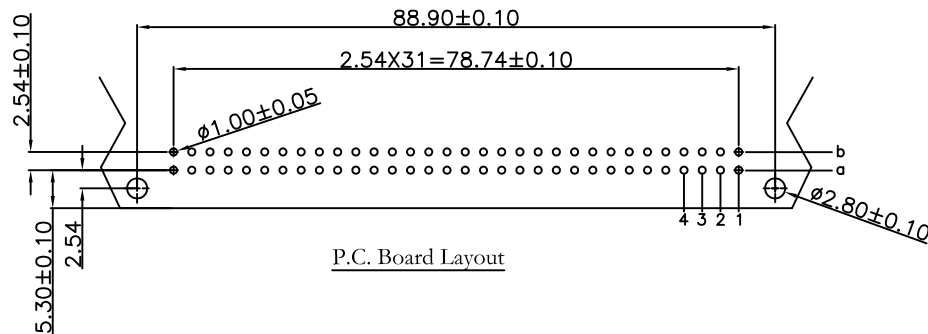

P.C. Board Layout

Pitch	Position	Rows With Contacts	Contact Arrange	P/N
2.54mm	64	a b		9001-C34641CxxA
	32	a -		9001-C34321CxxA
5.08mm	32	a b		9001-C44321CxxA
	16	a -		9001-C44161CxxA

Tolerances	Dwg. No.	9001-D0000-006
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
xx = ±0.15	Scale	1:1
	Drawn By	CCH9/12/26

Title:

9001-C Series
DIN41612 Q Type Female

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 9001-C3(4)4xx1Cxx(L1)A

SHEET	1/1	Ver. No.	R4
-------	-----	----------	----